


Model ASC 300C Beacon Tracking Receiver

Quality Products @ Reasonable Prices

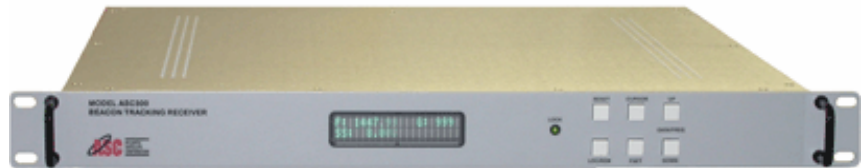

Functional Description

The Model **ASC300C Beacon Tracking Receiver** is a high performance unit that is designed to real time track the power density of a satellite beacon and output a DC voltage that is linearly proportional to the beacon power by utilizing a true, RMS-responding power detector. The applications for the **ASC300C** are for antenna tracking controllers and uplink power control system. Note: The model ASC300C can be offered with external BDC instead of an internal BDC.

Systems Specifications

Input Frequency 3400.000 to 4200.000 MHz
 **Internal Block Converter**
 Pre-detection Bandwidth 50 kHz
 Input Level..... - 85 dBm, min.; - 25 dBm max.
 For full tracking range capability
 Frequency Tuning 10 kHz Steps
 Frequency Adjust Front Panel or Remotely
 AFC ± 23 kHz
 Threshold <45 dB-Hz (C/N₀) for acquisition
 Input Impedance 50 Ohm
 Input Connector..... Type-N, Female
 Output Impedance..... 100 Ohm, single ended
 Output Connector..... Terminal plug and
 BNC Female
 Tracking Gradient..... 0.5 V/dB, Std
 Tracking Response 0 to +10 VDC
 for a 20 dB input level change
 System Level Adjust..... 60 dB, 0.5 dB Steps
 Frequency Stability..... <1 ppm, 0^o c to +50^o c
 Frequency Reference..... 10 MHz (Internal)
 Phase Noise..... >75 dB-Hz, 1 kHz from Carrier

Alarms Unit Lock
 Alarm Relay Form-C
 External Power..... None (Internal BDC)
 Continuous Digital Streaming..(optional) See Below *
 DB9 interface connector..(optional) See Below *
 Front Panel Display..... Vacuum Fluorescent
 M&C RS-232 or RS-422/485 Switchable
 on rear panel
 Ethernet 10/100 Base T (**Optional**)
 M&C Connector..... DB-9, Female
 RJ-45 Connector

Physical Characteristics

Size 1.75"H X 16.00"D X 19.00"W
 Weight..... 9 lb. (4.08 kg)
 Primary Power..... 90 - 264 VAC 47 - 63Hz
 Auto-Sensing

Environmental Specifications:

Operating Temperature 0^o c to +50^o c
 Storage Temperature -40^o c to +70^o c
 Humidity 95% RH@ 40^o c

* CDS Continuous Digital Streaming

The streaming option associated with the ASC300 series of beacon tracking receivers provides a continuous, two byte, data stream running at 9600 baud that contains ten bits of signal strength level indication as well as lock or alarm condition of the unit. A female DB9, interface connector on the rear of the unit is specifically dedicated for this option.

ATLANTIC SATELLITE CORPORATION

**259 Expressway Court
Virginia Beach, Virginia 23462**

Phone: 757-318-3500
 Fax: 757-318-7020
 Email: sales@atlanticsat.com
www.atlanticsat.com