

# AAV880 Series

## Ku-Band Transceiver

AAV880 Series Ku-Band SPT (Ku-Band Single Package Transceiver) is a RF ODU (Outdoor Unit) Transceiver for Satellite Communication. It is designed for voice, data and broadband VSAT communication used in different modulation formats including BPSK, QPSK, QAM and FM.

AAV880 SPT is a highly integrated ODU that comprises of Upconverter, SSPA (Solid State Power Amplifier), Down Converter, low phase noise synthesizer, power supply and built-in M&C. With independent frequency synthesizer, it enables end-users for transmission through different uplink and downlink transponders. In addition, Agilis has a wide range of SSPA booster options for higher power applications.

AAV880 SPT is suitable for SCPC (Single Channel Per Carrier), MCPC (Multi-Channel Per Carrier), DAMA (Demand Assigned Multiple Access) and TDMA (Time Division Multiple Access) applications.

### Features

- Available for all Ku-Band frequencies
- Broadband data transmission
- Easy installation & configuration
- Built-in monitor and control
- Built-in image rejection filter
- Very stable OCXO reference oscillator
- Output power monitoring
- Electronically tuneable synthesizer for Transmit and Receive
- 1kHz frequency step size
- Redundancy ready (Built-in)
- Surge protection
- 70 or 140MHz IF interface

### Enhanced Monitoring and Control

AAV880 Ku-SPT offers M&C via RS232/485. It features full remote M&C through Windows using PC.

These include:

- Tx/Rx level monitoring
- Temperature monitoring
- RF output ON/OFF
- Frequencies selection
- Gain control
- Automatic fault identification & alarm

### Reliability


Field proven under harsh environment conditions, Agilis ODUs can withstand temperature ranging from -40°C to +60°C with up to 100% humidity.

### Quality Assurance

All Agilis ODUs go through intensive active electrical stress screening with performance being monitored during screening. In addition, all units undergo 100% waterproof test equivalent to IP65 to ensure normal operation during tropical, cold and harsh environment.

# AAV880 Series

## Ku-Band Transceiver

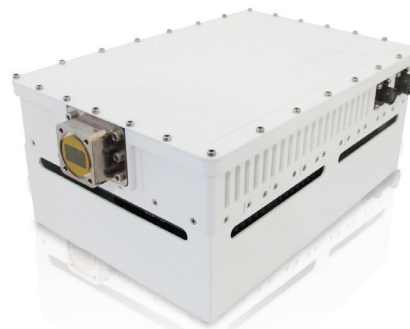

## Technical Specifications

### Ku-Band Frequency Range (GHz)

<b>Transmit</b>	14.00 – 14.50 (Standard) 13.75 – 14.50 (Extended)
<b>Receive</b>	10.95 – 11.70 11.70 – 12.20 12.25 – 12.75

### Transmit

Power	Output @P1dB (dBm) min	Min Gain (dB)	Typ AC Power Consumption (VA)
16W	42	75	150
25W	44	75	250
50W	46	75	300
80W	49	75	550
100W	50	75	550
200W	53	75	1300

<b>Input Frequency</b>	70±18MHz (Optional 140 ±36MHz)
<b>Output Frequency</b>	Ku-Band
<b>Frequency Step Size</b>	1kHz
<b>IF Input Power Range</b>	-25 to -5dBm
<b>Gain Flatness for 500MHz BW For 36MHz BW</b>	±2.0dB max ±1.25dB max
<b>Gain Stability ( -40°C to +60°C)</b>	±2.0dB max
<b>Gain Adjustment</b>	20dB@ 0.5dB steps
<b>Inter Modulation</b>	-25dBc@ Relative to combine power of two carriers at 3dB total power backoff from Rated Output power
<b>Spurious (36MHz BW)</b>	-55dBc max
<b>Phase Noise</b>	
@ 100Hz offset	-60dBc/Hz
@ 1KHz offset	-70dBc/Hz
@ 10KHz offset	-80dBc/Hz
@ 100KHz offset	-90dBc/Hz
<b>IF Input Interface</b>	50Ω N-Type Female
<b>RF Output Interface</b>	WR75/G
<b>Frequency Stability</b>	±0.5 ppb/day

### Monitor & Control

<b>Interface</b>	RS232/485
<b>Optional Interface</b>	Ethernet IP 10/100 Base-T, SNMP
<b>Form "C" Relay Contacts</b>	Optional

### Compliance Standard

<b>IEC 60950</b>	International Safety Standard for Information Technology Equipment
<b>ETSI EN 300 673</b>	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Electromagnetic Compatibility (EMC) Standard for Very Small Aperture Terminal (VSAT)
<b>ETSI EN 301 489-1</b>	Electromagnetic Compatibility and Radio Spectrum Matters (ERM); Electromagnetic Compatibility Standard for Radio Equipment and Services

### Environmental

<b>Operating Temperature</b>	-40°C to +60°C
<b>Relative Humidity</b>	Up to 100%

### Receive (exclude LNA)

<b>Input Frequency</b>	950 to 1450MHz (Optional 900 to 1700MHz)
<b>Output Frequency</b>	70±18MHz (Optional 140 ±36MHz)
<b>Output Frequency(Optional)</b>	950 to 1450MHz
<b>Output Power@ P1dB</b>	0dBm min
<b>Frequency Step Size</b>	1kHz
<b>Gain</b>	25dB min
<b>Gain Adjustment</b>	20dB @1dB steps
<b>Gain Flatness (36MHz BW)</b>	±1.25dB max
<b>Gain Stability ( -40° to +60°)</b>	±3.0dB max
<b>Intermodulation Product</b>	-35dBc max
<b>Spurious (36MHz BW)</b>	-55dBc max
<b>Phase Noise</b>	
@ 100Hz offset	-60dBc/Hz
@ 1KHz offset	-70dBc/Hz
@ 10KHz offset	-80dBc/Hz
@ 100KHz offset	-90dBc/Hz
<b>Input Interface</b>	50Ω N-Type Female
<b>Output Interface</b>	50Ω N-Type Female

### Power Supply

<b>Input Voltage (Factory Preset)</b>	90 – 264 VAC
<b>DC Output Voltage to LNB</b>	+13Vdc at RF IN connector

### Mechanical

<b>Dimensions</b>	360L x 220W x 172H mm (16W - 50W) 360L x 220W x 200H mm (80W / 100W) 600L x 250W x 300H mm (200W)
<b>Weight</b>	11kg (16W - 50W) 13kg (80W / 100W) 31kg (200W)
<b>Colour</b>	White Powder Coat

Note: All specification are subject to change without notice.  
Rev. 050514

[www.agilissatcom.com](http://www.agilissatcom.com)

For more information, please send enquiry to:

**Singapore (Headquarters)**

[mktg\\_satcoms@stee.stengg.com](mailto:mktg_satcoms@stee.stengg.com)

**USA**

[usa\\_satcoms@stee.stengg.com](mailto:usa_satcoms@stee.stengg.com)

**Europe**

[europe\\_satcoms@stee.stengg.com](mailto:europe_satcoms@stee.stengg.com)

