



150W to 200W
ARMA-2000S® series



Features

- High gain and linearity
- Output power up to 200W
- Gain adjustment (Local & Remote)
- Remote Monitor & Control (Local & Remote)
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- Power factor correction
- CE Marking

Overview

The ARMA-2000S® series are the rack-mount solid-state power amplifiers (SSPAs), operating in S-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for indoor operation, the amplifiers are of compact size and occupy four rack-mounting spaces (4 RU - 7") of a standard 19-inch rack. Built-in microprocessor controller provides capability for serial port interfaces (RS485) for remote monitoring and control.

Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.

Application

The featured SSPAs are designed for S-Band satellite up-link applications. They are designed for 19-inch rack mounting in a protected environment. The ARMA-S series are available in output power from 50W to 1000W. For higher power Advantech provides phase-combined systems. Other SSPAs are available for operation at other satellite frequency bands. With all the features of the ARMA-S, Advantech also offers a built-in converter.

Redundancy

With the addition of the appropriate waveguide and switch kit, the ARMA-2000S® amplifiers can be easily converted for the operation in 1:1 redundant configuration without the use of any external controller. Full remote Monitor and Control of the redundant system is accessible via the serial port (RS-485).

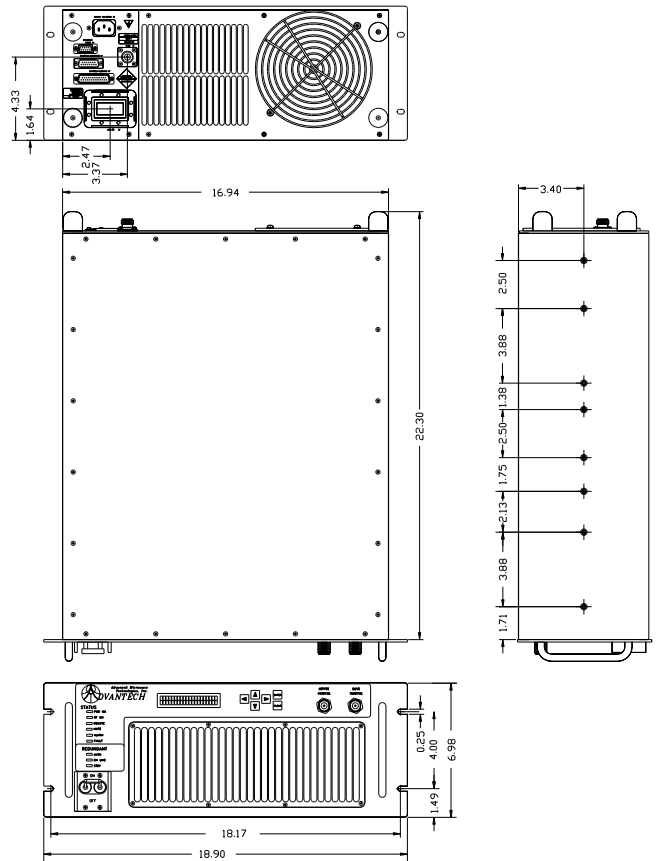


Table A

Band	RF Band (GHz)	Output Power (W)
S	2.025 - 2.120	150 - 200

Options

- 1:1 or 1:2 Redundant configuration
- Phase combined systems for higher power
- L-Band input (SSPB/BUC operation)
- SNMP interface

Accessories

- Mounting slides
- Remote M&C panel

S-Band Rack-mount



Technical Specifications	150W	200W				
Electrical Characteristics						
Availability in this series						
S	√	√				
Output power (P _{SAT})	+52 dBm	+53 dBm				
Output power (P1dB) min	+51 dBm	+52 dBm				
Power Gain @ max setting	65 dB min					
Frequency range	2.025 GHz - 2.120 GHz					
Gain adjustment range	20 dB					
Max input power w/out damage	+10 dBm					
Gain flatness	±1.5 dB max over full band ±0.6 dB over 10 MHz at 25°C					
Gain slope	0.015 dB/ MHz max.					
Gain variation over temperature	±1.5 dB over full operating range (temperature compensation mode)					
Gain variation over 24 hours	±0.25 dB max at constant temperature & drive level					
Input VSWR	1.3:1					
Output VSWR	1.4:1					
Noise Power Density	-100 dBm/Hz max in TX band					
Spurious at rated power	-65 dBc, max.					
Harmonics at rated power	-90 dBc, max					
AM/PM conversion at rated power	2.5°/dB max. at P1dB, 1°/dB max. at 3 dB back-off from rated P1dB					
Third order IMD (two equal tones 5 MHz apart)	-26 dBc max. at 3 dB total back-off from rated P1dB					
Group Delay	Linear: 0.01 nsec/MHz max. Parabolic: 0.002 nsec/MHz ² max. Ripple: 0.5 nsec p-p max.					
Residual AM (F* - frequency in kHz)	0-10 kHz -45 dBc 10 kHz - 500 kHz -20 (1.25+log F*) dBc 500 kHz - 1 MHz -80 dBc					
Power Requirements						
AC input voltage	90-264 VAC auto ranging (47-63 Hz)					
Power consumption (nom.) (W)	600	800				
Mechanical Characteristics						
Panel Height	4 RU of 19" rack					
Weight	30 kg (66 lbs)					
Interfaces:	RF input RF output Output sample port	N-Type (F) N-Type (F) N-Type (F)	Redundancy RS-232 RS-485	D-sub 25S D-sub 9S D-sub 9S	Discrete port AC Line	D-sub 9S IEC 320 inlet
Environmental Conditions						
Temperature:	Operating Storage	0°C to +50°C -55°C to +85°C				
Humidity	5%-95%, non-condensing					
Altitude	10,000' AMSL, de-rated 2°C/1,000' from AMSL					

NORTH AMERICA
USA
Tel: +1 703 788-6882
Fax: +1 703 788-6511
info.usa@advantechwireless.com

CANADA
Tel: +1 514 420-0045
Fax: +1 514 420-0073
info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS
Tel: +7 495 967 1859
Fax: +7 495 967 30 24
info.russia@advantechwireless.com

SOUTH AMERICA
BRAZIL
Tel: +55 11 3054 5701
Fax: +55 11 5041 4026
info.brazil@advantechwireless.com

ARGENTINA
Tel: +54 11 4731 1034
Cel: +54 911 4492 5601
info.argentina@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.:PB-ARMA-S-150-200-11021